
PRODUCT DATA SHEET

300SD

N Series: Sliding Door Plunger Lock



Available Finishes

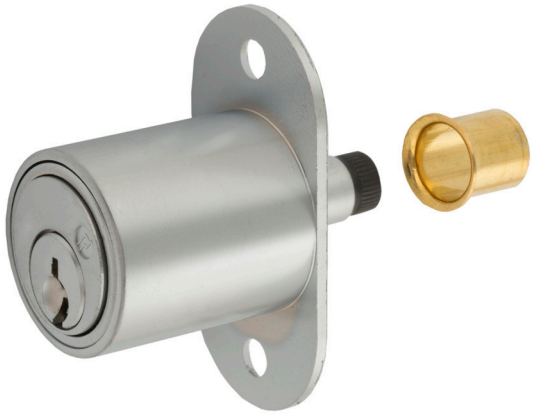

US26D *US3* *US10B*

SPECIFICATIONS

Keying: Can be keyed together with other N Series locks
Rekeyable: Easily rekeyable via speed-release cylinder release mechanism
US Patent Nos: 4,920,774; 5,121,619
Standard Function: Key removable in locked or unlocked position
Body: Zinc die cast
Cylinder: Solid brass, pin tumbler
Cylinder Length: 1"
Barrel Diameter: 1"
Finish: 26D, US3, or 10B
Packaged: Packed 10 per box


Keying Information

Keyway: N Series (equivalent to National D4291 4-pin or D4292 5-pin system)
Keys: Includes 2 keys per lock
Stock Keying: KD/KA; 4-pin standard
Stock KA#: 101, 103, 107, 915
Masterkeyed: 5-pin standard
Grand Masterkeyed: Available
Keyblank 4-pin: KBN-4-NP (equivalent to NA14, 1069L)
Keyblank 5-pin: KBN-5-NP (equivalent to NA12, 1069LA)


Included Accessories

34-9: Matching thimble strike
10-24: Machine thread bolt extender for varying gaps between bypassing doors
10-24: Machine thread strike locator

DIMENSIONS

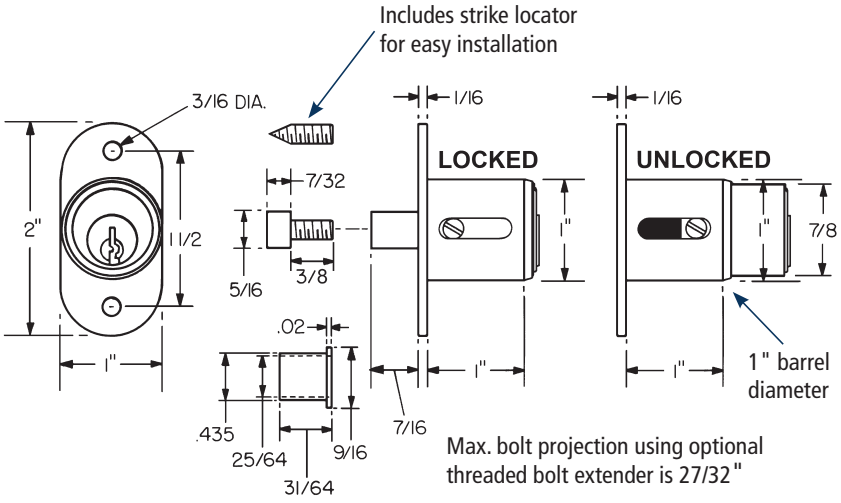


Strike Locator




Use strike locator to correctly mark location to install strike.

Bolt Extender




Use optional bolt extender for excessive gaps in bypassing doors.

Closed



Open



WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

206-362-3290 | 800-525-0954
www.olympuslock.com
© 2025 Olympus Lock, Inc.

OLYMPUS® LOCK INC