
PRODUCT DATA SHEET

723S

SFIC: Sliding Door Cylinder Housing

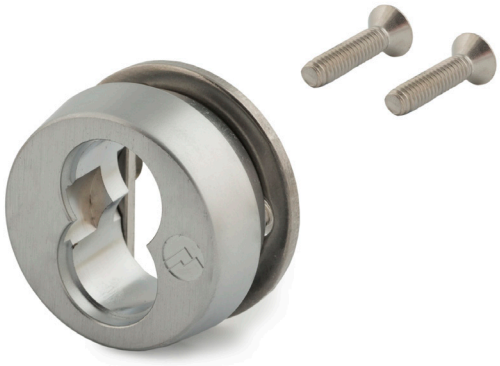

BEST

BEST compatible interchangeable core cylinders

SPECIFICATIONS

Retrofits: Best 4S
Function: Sliding door cylinder housing for bypassing sliding doors. Core acts as stop for interior sliding door
Material Thickness: Adjustable to fit varying material thickness. Includes three screw lengths: 7/16", 3/4" and 1"
Material: Zinc die cast
Finish: US26D or US26

Keying Information

Cores: Not included, requires special core
Accepts: Best (6C or 6CP), Arrow, Falcon, KSP, Schlage SFIC, or equivalent small format interchangeable cores

Included Accessories

Screws: Includes 3 sizes of screws (7/16", 3/4", and 1") to adapt lock for use on varying material thicknesses

Optional Accessories

SFIC Cores: 207S Series

Optional Accessories

207S Series Cores for use with 723S


- 207S Series 7-pin SFIC cylinder




Available Keyways

A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	

Dimensions

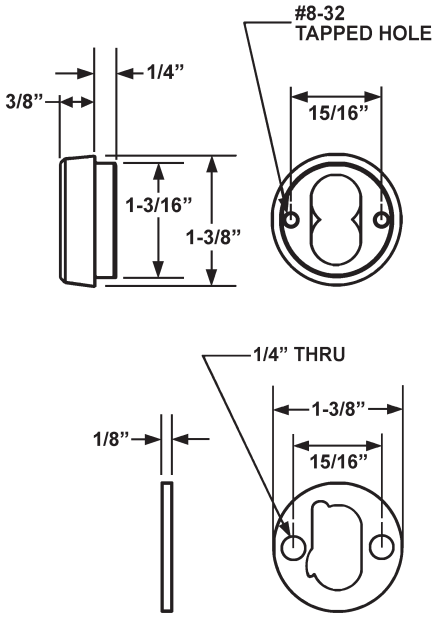

Typical Installation

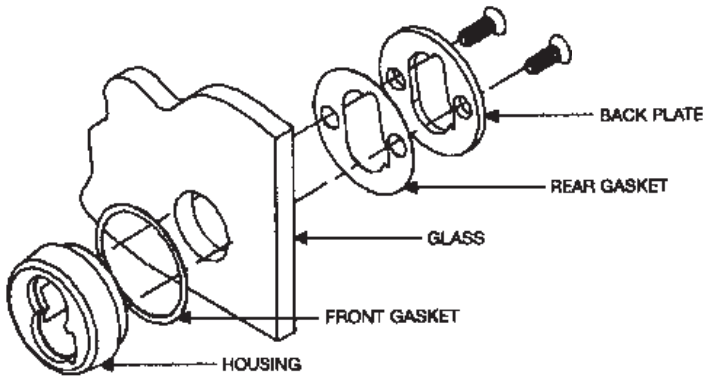

Note: Lock can be adjusted for use on different material thicknesses by using an "O" ring or changing the screw length. The 723S ships standard with 3 screw sizes (7/16", 3/4" and 1").

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

206-362-3290 | 800-525-0954
www.olympuslock.com
© 2025 Olympus Lock, Inc.

OLYMPUS® LOCK INC